

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 July 2004 (22.07.2004)

PCT

(10) International Publication Number  
WO 2004/061477 A1

(51) International Patent Classification<sup>7</sup>: G01T 1/164, 1/29

(74) Common Representative: KONINKLIJKE PHILIPS  
ELECTRONICS N.V.; c/o LUNDIN, Thomas, M., 595  
Miner Road, Cleveland, OH 44143 (US).

(21) International Application Number:

PCT/IB2003/006242

(22) International Filing Date:

19 December 2003 (19.12.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/438,222

6 January 2003 (06.01.2003) US

(71) Applicant (for all designated States except US): KONIN-  
KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL];  
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,  
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,  
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,  
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,  
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and


(75) Inventor/Applicant (for US only): GAGNON, Daniel  
[CA/US]; 595 Miner Road, Cleveland, OH 44143 (US).

Published:

— with international search report

[Continued on next page]

(54) Title: CONSTANT RADIUS SINGLE PHOTON EMISSION TOMOGRAPHY

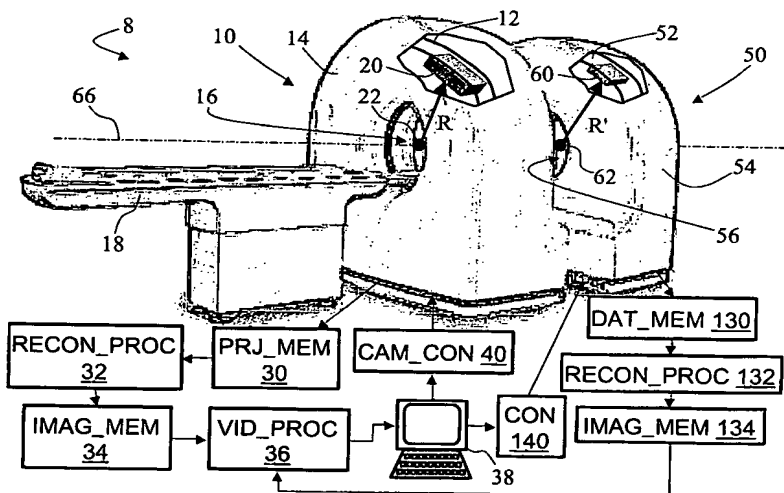

(57) Abstract: A nuclear camera (10) includes four or more gamma detectors (20, 20', 20'', 201, 202, 203, 204, 205, 206) arranged on a generally circular rotatable gantry (12, 12', 12'', 12''') around an imaging region that emits emission radiation. The gamma detectors are each disposed at a fixed equal distance (R, R2, R3, R5) from an imaging isocenter (22, 22', 22'', 22''') to rotate in a fixed radius circular orbit. Each gamma detector includes a radiation sensitive surface (72) that responds to the emission radiation and a slat collimator (70) that spins about an axis 88. Resolution and sensitivity at the fixed radius are selected by selecting collimator slat height (Wz) and spacing (G) and radiation sensitive surface width (Cy). The gamma detectors and rotating gantry are enclosed in an optically opaque toroidal housing (14) that defines a generally circular bore (16) that admits imaging subjects over a range of sizes.

WO 2004/061477 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*